

FIGURE 1: SLOPED ROOF TERMINOLOGY

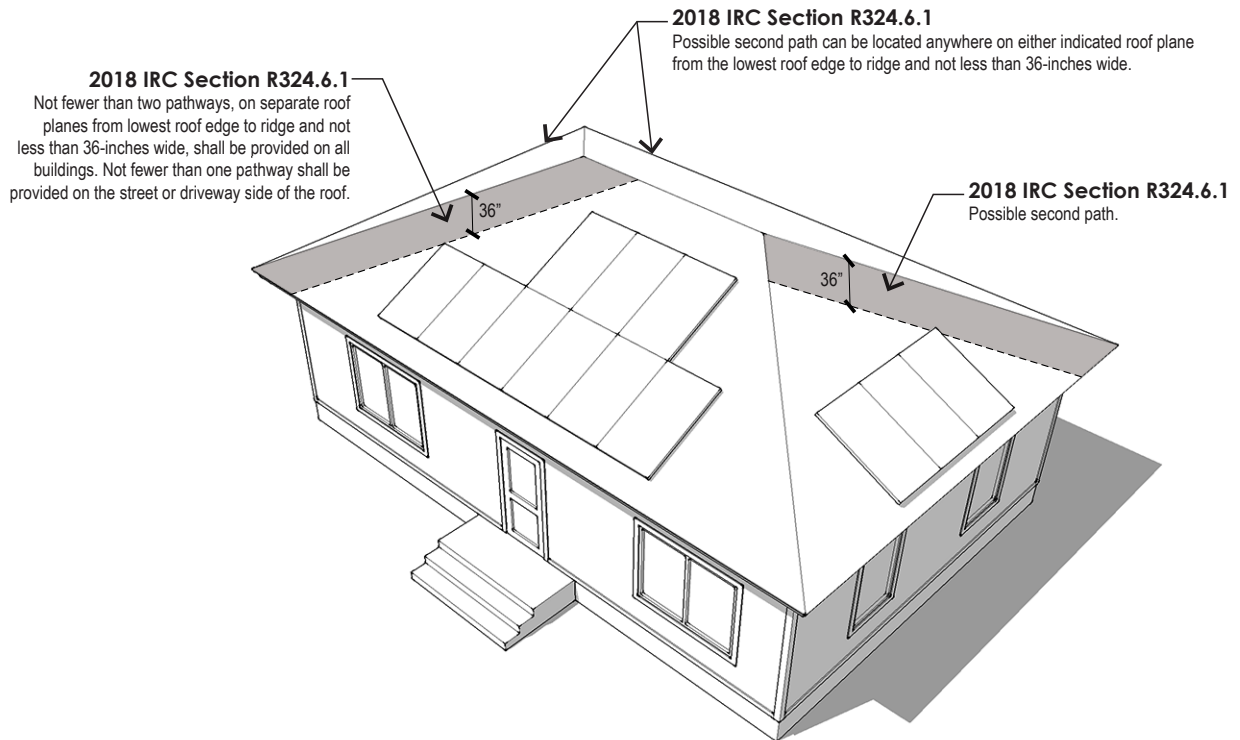


FIGURE 2: DWELLINGS AND HABITABLE DETACHED STRUCTURES WITH ROOF SLOPED MORE THAN 2:12

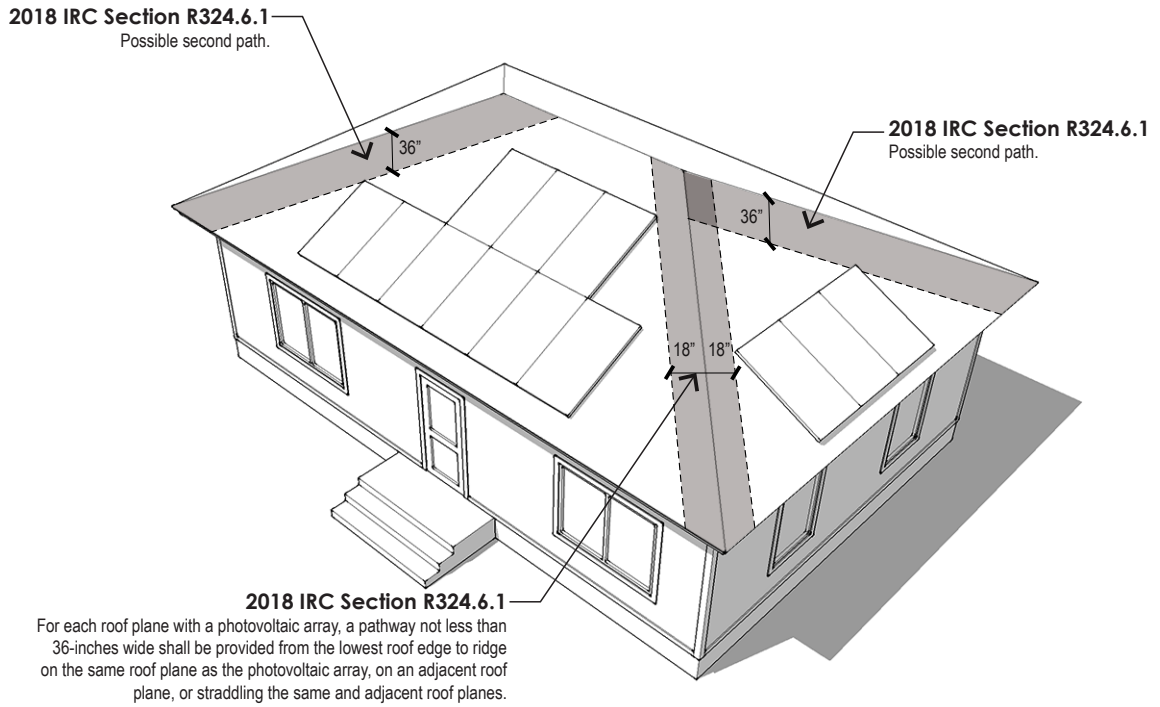


FIGURE 3: DWELLINGS AND HABITABLE DETACHED STRUCTURES WITH ROOF SLOPED MORE THAN 2:12


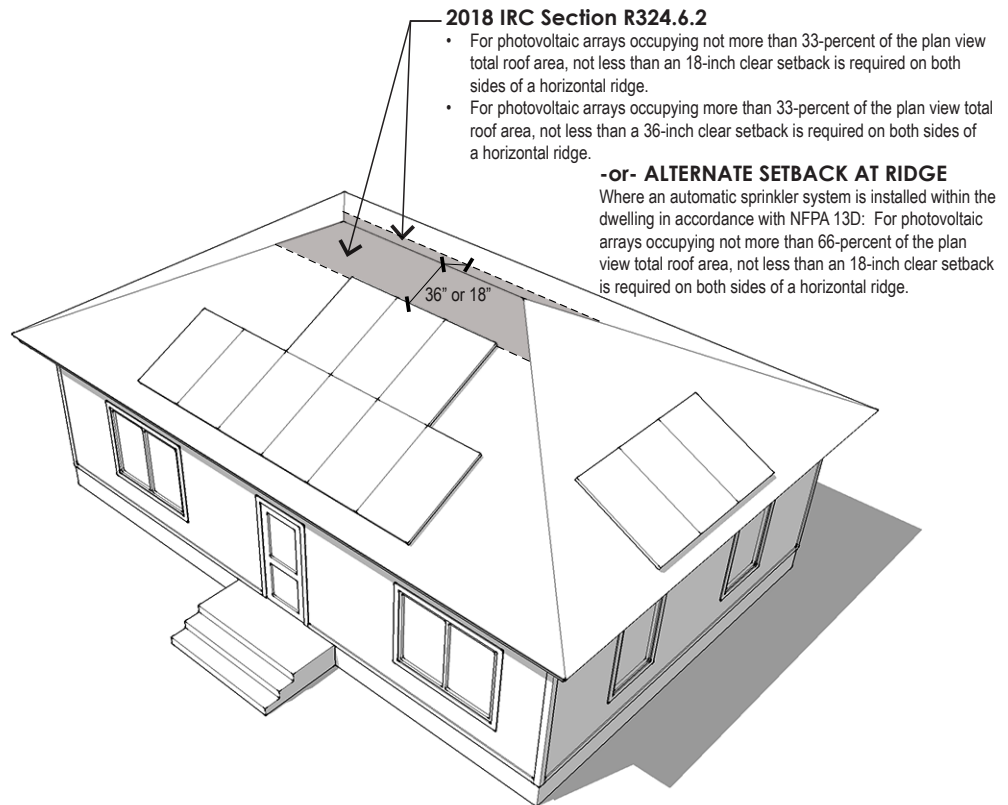


FIGURE 4: DWELLINGS AND HABITABLE DETACHED STRUCTURES WITH ROOF SLOPED MORE THAN 2:12

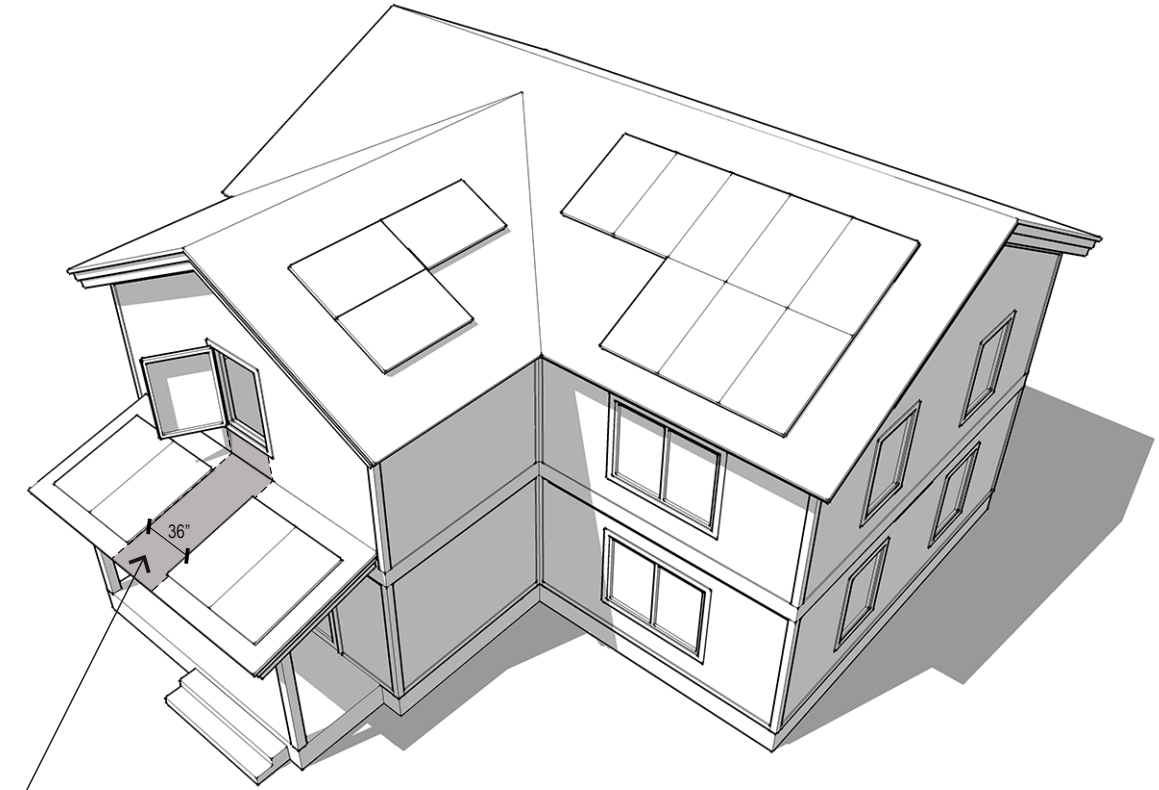

2018 IRC Section R324.6.2.2

Panels and modules installed on dwellings shall not be placed on the portion of a roof that is below an emergency escape and rescue opening. A pathway not less than 36-inches wide shall be provided to the emergency escape and rescue opening.

FIGURE 5: EMERGENCY ESCAPE AND RESCUE OPENING